


VTR - STY

Panel's composition

SKINS OF POLYESTER GRP with white gel coat
 RAL 9010 and protection scratch resistant film on
 gel coat side
UV resistant
Approved for contact with food products

CORE
 extruded Polystyrene foam
Density: 30 - 33 - 40 Kg/m³

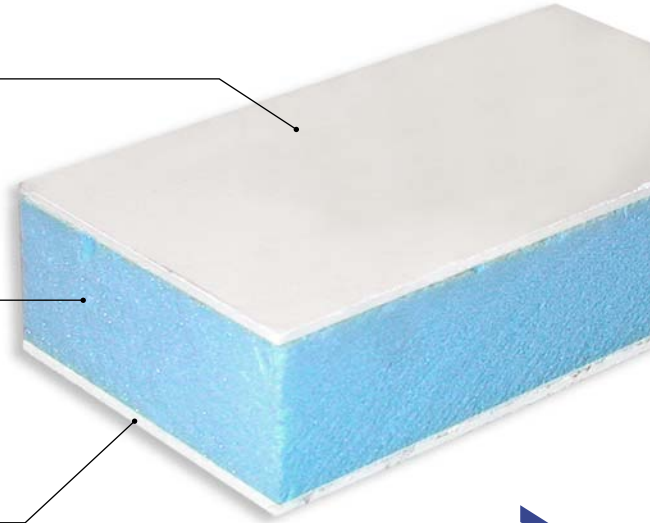

- On request:
- RAL colours,
 - certificate of approval for food application,
 - certificate of UV resistance.

Panel's weight

- Polystyrene foam core, density 33 kg/m³
- Tolerances ± 0,5 mm
- Thickness starting from 15 mm.
- Thickness' tolerance ± 0,5 mm
- Dimension's tolerance ± 30 mm


Total thickness mm	15	20	25	30	40
SKINS' thickness mm	1,5 + 1,5				
CORE'S thickness mm	12	17	22	27	37
Weight kg/m²	5,5	5,7	5,8	6,0	6,3

Foam core's properties

Density	40
Temperature °C	- 50 / + 75
Fire resisting property	Class B1

Standard dimensions (max)

(other dimensions available on request)

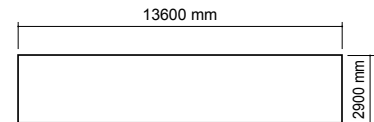

Polystyrene foam core